

OVS

Residential Wall Fan Heater



OVS
with Surface
Mounting Box

OVS
Recessed



OVRP

Compact Ceiling Fan Heater



OVRP
with Surface
Mounting Box

OVRP
Recessed

Features

Color

- Standard: white, almond.
- Optional (upcharge applicable): metallic silver, bronze, metallic charcoal, aluminum, semi-gloss black, sand.
- Custom colors available upon request.

Finish

- Standard: epoxy/polyester powder paint.

Construction

- 20-gauge steel cabinet.
- 22-gauge steel front cover.
- High-limit temperature control with automatic reset.

Fan

- Quiet fan operating.
- 120V, 208V, 240/208V models:
500W to 1000W; 40 cfm fan and 1250W to 2000W; 80 cfm fan.
- 347V models : 80 cfm fan.
- Factory-lubricated motor.

Heating element

- 120V, 208V, 208/240V: durable tubular heating element with fins.
- Factory sealed element available.
- 347V: Iron-Chromium-Aluminum alloy.

Control

- If an electronic thermostat is used, it must be compatible with forced-air heaters.

Installation

- Quick installation with recess box mounting holes.
- Large wiring compartment.
- Surface mounting box available.
- Tight fit with V-shaped recess box.

Warranty

- 5-year warranty against defects.

Application

- Entrance way, kitchen, bathroom, family room, basement.

OVS Features

Voltage

- 120V, 208V, 240/208V, 347V, 1-phase.

Control

- Built-in thermostat available with a control knob or tamperproof.

Installation

- Wall installation only.
- The air outlet should be installed at least 4 in. (102 mm) from flooring withstands temperature and 10 in. (254 mm) from linoleum flooring.
- May be recessed in 2 in. X 3 in. stud partitions.

OVRP Features

Voltage

- 120V, 240/208V, 347V, 1-phase.


Control

- Must be used with a compatible wall thermostat (not included).
- Electronic relay available.

Installation

- Ceiling installation only.
- The air outlet should be installed at least 10 in. (25.4 cm) from the wall.
- May be recessed in ceiling.

Mounting positions available. Pictures showing front panel. Directional vane air flow.

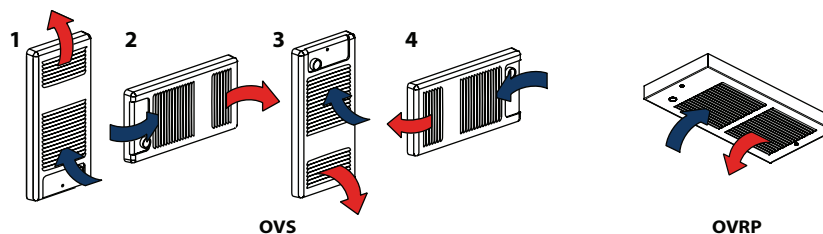

OVS Models

Watts	Volts	Product #	Price	Weight	
				lb	kg
500	120	OVS0502	279.00	9.0	4.1
750	120	OVS0752	279.00	9.0	4.1
1000	120	OVS1002	297.00	9.0	4.1
1250	120	OVS1252	323.00	9.0	4.1
1500	120	OVS1502	323.00	9.0	4.1
2000	208	OVS2008	353.00	9.0	4.1
500/375	240/208	OVS0500	274.00	9.0	4.1
750/563	240/208	OVS0750	274.00	9.0	4.1
1000/750	240/208	OVS1000	289.00	9.0	4.1
1250/938	240/208	OVS1250	289.00	9.0	4.1
1500/1125	240/208	OVS1500	319.00	9.0	4.1
2000/1500	240/208	OVS2000	345.00	9.0	4.1
1000	347	OVS1007	361.00	9.0	4.1
1500	347	OVS1507	378.00	9.0	4.1
2000	347	OVS2007	400.00	9.0	4.1

OVRP Models

Watts	Volts	Product #	Price	Weight	
				lb	kg
500	120	OVRP0502	355.00	9.0	4.1
750	120	OVRP0752	355.00	9.0	4.1
1000	120	OVRP1002	378.00	9.0	4.1
1250	120	OVRP1252	415.00	9.0	4.1
1500	120	OVRP1502	415.00	9.0	4.1
500/375	240/208	OVRP0500	346.00	9.0	4.1
750/563	240/208	OVRP0750	346.00	9.0	4.1
1000/750	240/208	OVRP1000	366.00	9.0	4.1
1250/938	240/208	OVRP1250	366.00	9.0	4.1
1500/1125	240/208	OVRP1500	405.00	9.0	4.1
500	347	OVRP0507	533.00	9.0	4.1
1000	347	OVRP1007	559.00	9.0	4.1
1500	347	OVRP1507	598.00	9.0	4.1
2000	347	OVRP2007	663.00	9.0	4.1

OVS Options

Product # Kit	Product # Factory installed*	Price	Description
KIT-OVS-BS	-	67.00	Surface mounting box
KIT-OVS-DIS ¹	DIS ¹	163.00	Disconnect switch, 20A at 277V max. (120V, 208V, 240/208V only)
-	ES ²	29.00	Factory sealed element (120V, 208V, 240/208V only)
KIT-OVS-TB6	TB6	59.00	Single-pole bi-metal thermostat (347V factory installed only)
KIT-OVS-TB26 ³	TB26 ³	72.00	Double-pole bi-metal thermostat (347V factory installed only)
KIT-OVS-TB6-AV	TB6AV	69.00	Single-pole bi-metal tamperproof thermostat (347V factory installed only)
KIT-OVS-TB26-AV ³	TB26AV ³	72.00	Double-pole bi-metal tamperproof thermostat (347V factory installed only)

OVRP Options

Product # Kit	Product # Factory installed*	Price	Description
KIT-OVR-BS	-	73.00	Surface mounting box
KIT-OVR-DIS ¹	DIS ¹	179.00	Disconnect switch, 20A at 277V max. (120V, 208V, 240/208V only)
-	ES ²	33.00	Factory sealed element (120V, 208V, 240/208V only)
-	TRIAC ⁴	83.00	Single-pole electronic relay, coil 24V, without transformer, 15A at 347V max.
-	TRIACT ⁴	113.00	Single-pole electronic relay, coil 24V, with transformer, 15A at 208V, 240V, 277V, 347V

* For factory installed options, add the option number to the product number. See the **Product Code** section inside the front cover.

¹ For the U.S. only: The nominal current of the unit must not exceed 80% of the capacity of the disconnect.

² The option "sealed element" increases the reliability of these in humid environments. It does not completely eliminate the leakage currents of metal sheathed heating elements.

³ "Off" position.

⁴ The TRIAC and TRIACT option is only available for the products OVRP0507, OVRP0757 and OVRP1007.

Add "BL" for white, "AM" for almond.

Upcharge applicable for optional colors shown in the color chart section.

