


OVOH

Horizontal Wall Fan Heater

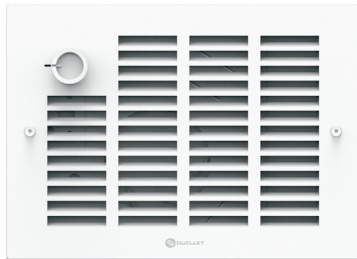

Features

Color

- Standard: white.

Finish

- Standard: epoxy/polyester powder paint.

Voltage

- 120V, 208V, 240/208V, 1-phase.

Construction

- 22-gauge steel cabinet, 20-gauge steel grille.
- High-limit temperature control with manual reset.
- Additional one-time thermal fuse.

Fan

- Quiet fan.

Heating element

- Nichrome heating element provides instant heat.

Control

- Built-in double-pole thermostat (-T2 models).
- Wall thermostat (not included, the use of an electronic thermostat is strongly recommended).

Note: If an electronic wall-mounted thermostat is used, it must be compatible with forced-air heaters.

- Controls located at the top of the unit.

Installation

- 6 in. (150 mm) minimum clearance to floor or any adjacent surfaces.
- 6 in. (150 mm) minimum clearance from ceiling.
- Recessed only.
- Quick and easy installation easily retrofits most popular models.
- Wattage can be selected onsite.

Warranty

- 5-year warranty.

Application

- Hallway, lobby, living room, kitchen, bedroom, office.

Models

Watts ¹	Volts	Product # Without thermostat ²	Product # Built-in thermostat	BTU/hr	Weight	
					lb	kg
1000 or 500	120	OVOHU1002BL	OVOHU1002BL-T2	3413 or 1706	7.3	3.3
1500 or 750	120	OVOHU1502BL	OVOHU1502BL-T2	5119 or 2560	7.3	3.3
1000 or 500	208	OVOHU1008BL	OVOHU1008BL-T2	3413 or 1706	7.3	3.3
2000 or 1000	208	OVOHU2008BL	OVOHU2008BL-T2	6825 or 3413	7.3	3.3
1000/750 or 500/375	240/208	OVOHU1000BL	OVOHU1000BL-T2	3413/2560 or 1706/1280	7.3	3.3
1500/1125 or 750/560	240/208	OVOHU1500BL	OVOHU1500BL-T2	5119/3839 or 2560/1911	7.3	3.3
2000/1500 or 1000/750	240/208	OVOHU2000BL	OVOHU2000BL-T2	6825/5119 or 3413/2560	7.3	3.3

Option

Product # Kit	Description
KIT-OVO-BB6	Back box (6 pack)

Standard color is white.

Add -SBE after BL for unit without back box. (Available for United States market only.)

¹ Wattage can be selected onsite.

² Requires non pulsing wall-mounted thermostat. Please refer to the Wall Thermostats Reference Chart at the end of the catalog.

