

# ORP Architectural Radiant Panel



## Features

### Color

- Standard: polar white PW.
- Optional (upcharge applicable): Black Therma Ray PB-0218-HT -SP.

### Finish

- High-temperature polyester powder paint.

### Voltage

- 120V, 208V, 240V, 277V, 347V.

### Construction

- Reflective foil used to adhere to the panel heating elements.
- High-temperature mineral wool insulation, 4 PSF density, 2" (50.8 mm) thick.
- 22-gauge galvanized steel panel frame and front.
- Internal junction box with cover.
- Optional external junction box.
- Suspension clips in all four corners of the panel (suspension wires not included).
- Custom sizes available upon request.

### Heating element

- Nickel-chrome alloy resistance wire, PTFE insulation evenly distributed over the panel.

### Density

- 65 to 95W/sq. ft. at rated voltage.

### Control

- Line voltage control circuit for thermostat, timer or switch (not included, must be compatible with the selected voltage and wattage of the heater).

*Ouellet highly recommends using an electronic wall thermostat for greater comfort.*

### Certification

- CSA STD C22.2 No.46.

### Installation


- Suspended from a ceiling or inserted into a T-Bar suspended ceiling.
- Variety of accessories available for surface installation with the SF frame on a gypsum ceiling or recessed with the PF frame.
- 2 in. (50.8 mm) minimum clearance above the panel.
- Minimum installation height from floor: 7 ft. (2.13 m).
- Relocation possible.

### Warranty

- 1-year on the paint.
- 10-year on the heating element.

### Application

- Commercial building, office building, hospital, school, daycare, private residence.

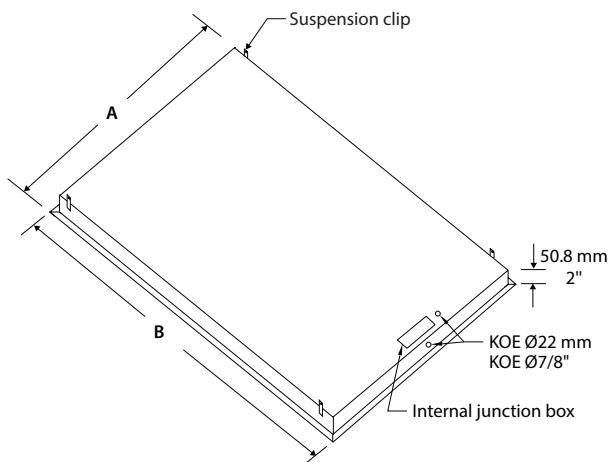

	AS2424		AS2448		AS1448		AS1460	
	mm	in.	mm	in.	mm	in.	mm	in.
<b>A</b>	603.25	23 3/4	603.25	23 3/4	349.25	13 3/4	349.25	13 3/4
<b>B</b>	603.25	23 3/4	1212.85	47 3/4	1212.85	47 3/4	1517.65	59 3/4

# ORP Models<sup>1</sup>

Watts	Product #				Price	Weight	
	120V	208V	240V	347V		lb	kg
<b>23-3/4" x 23-3/4" Panel</b>							
250	AS2424-250-120PW	-	AS2424-250-240PW	AS2424-250-347PW	471.00	15	6.8
300	-	-	-	AS2424-300-347PW	484.00	15	6.8
310	-	AS2424-310-208PW	AS2424-310-240PW	-	484.00	15	6.8
335	AS2424-335-120PW	-	-	-	484.00	15	6.8
375	AS2424-375-120PW	AS2424-375-208PW	-	AS2424-375-347PW	484.00	15	6.8
<b>23-3/4" x 47-3/4" Panel</b>							
500	AS2448-500-120PW	-	AS2448-500-240PW	AS2448-500-347PW	685.00	30	13.6
535	-	AS2448-535-208PW	-	-	685.00	30	13.6
625	AS2448-625-120PW	AS2448-625-208PW	AS2448-625-240PW	-	693.00	30	13.6
650	-	-	-	AS2448-650-347PW	693.00	30	13.6
700	-	-	-	AS2448-700-347PW	693.00	30	13.6
725	-	-	AS2448-725-240PW	-	693.00	30	13.6
750	AS2448-750-120PW	AS2448-750-208PW	-	AS2448-750-347PW	693.00	30	13.6
<b>13-3/4" x 47-3/4" Panel</b>							
300	-	-	AS1448-300-240PW	-	471.00	18	8.2
350	AS1448-350-120PW	-	-	-	471.00	18	8.2
400	-	AS1448-400-208PW	-	AS1448-400-347PW	471.00	18	8.2
435	-	AS1448-435-208PW	AS1448-435-240PW	-	484.00	18	8.2
<b>13-3/4" x 59-3/4" Panel</b>							
350	AS1460-350-120PW	-	-	-	568.00	22	10
375	-	-	AS1460-375-240PW	-	568.00	22	10
450	-	AS1460-450-208PW	-	-	582.00	22	10
540	-	-	-	AS1460-540-347PW	582.00	22	10
550	-	-	AS1460-550-240PW	-	582.00	22	10

<sup>1</sup> Allow a maximum of approximately 6 weeks of production lead time.

Standard color is polar white PW.

To order the optional color Black Therna Ray PB-0218-HT, replace the PW at the end of the part number by -SP. Ex.: AS2448-750-120-SP.

## Options

Product # Kit	Product # Factory installed*	Price	Description
-	FC48	128.00	48 in. (121.92 cm) flexible conduit
PF-1448PW	-	138.00	Frame for recessed installation on gypsum ceiling, 14 1/14" x 48 1/48"
PF-1460PW	-	142.00	Frame for recessed installation on gypsum ceiling, 14 1/14" x 60 1/48"
PF-22PW	-	109.00	Frame for recessed installation on gypsum ceiling, 24 1/14" x 24 1/48"
PF-24PW	-	117.00	Frame for recessed installation on gypsum ceiling, 24 1/14" x 48 1/48"
-	WT	Upon Request	Silicone seams, including a 36 in. (91.44 cm) Sealtite® conduit
SF-1448PW	-	139.00	Frame for surface installation on gypsum ceiling, 14" x 48"
SF-1460PW	-	145.00	Frame for surface installation on gypsum ceiling, 14" x 60"
SF-22PW	-	108.00	Frame for surface installation on gypsum ceiling, 24" x 24"
SF-24PW	-	117.00	Frame for surface installation on gypsum ceiling, 24" x 48"

\* For factory installed options, add the option number to the product number. See the Product Code section inside the front cover.

Variety of control panel available upon request.