


# OMP Mini Aluminum Electric Baseboard Heater

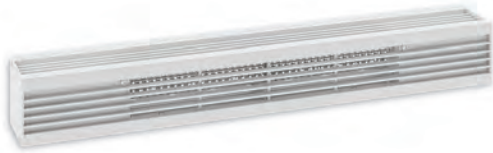

## Features

### Color

- Standard: white, almond.
- Optional (upcharge applicable): metallic silver, bronze, metallic charcoal, aluminum, semi-gloss black, sand.
- Custom colors available upon request.

### Finish

- Standard: epoxy/polyester powder paint.
- Optional: anodized aluminum.

### Voltage

- 120V, 208V, 240/208V, 277V, 347V, 480V, 600V, 1-phase.

### Construction

- Robust, 18-gauge cold rolled steel cabinet.
- 14-gauge (0.0787 in. [2 mm]) aluminum front and top.
- Pencil-proof openings 1/4 in. (6.4 mm).
- 3 in. x 3 in. (76 mm x 76 mm) compact profile.
- Linear high-limit temperature control with automatic reset.

### Heating element

- Stainless steel tubular heating element with aluminum fins.
- Floating heating element on high-temperature nylon bushings reducing expansion noises.

### Watt density

- Average standard watt density of 152W/ft.

### Control

- Built-in tamperproof thermostat available (installed on the left end only).
- Mechanical or electronic relays available (installed on the right end only).

*Ouellet highly recommends using an electronic wall thermostat for greater comfort.*

### Installation

- 2 rows of mounting holes, every 2 in. (51 mm), for ease of installation.
- Variety of accessories available for wall-to-wall installation.
- Pedestal kit available.

### Warranty

- 3-year warranty against defects.
- 10-year warranty on the heating element.

### Application

- Patio door, bay window, commercial building, office building, condos, restaurant.

Average Standard Watt Density Models 152W/ft.

Watts	Product #				Watts 240/208V	Product # 240/208V	Price	Length		Weight	
	120V	208V	347V	600V				in.	mm	lb	kg
300	OMP0302	OMP0308	-	-	300/225	OMP0300	389.00	23 5/8	600	5.3	2.4
450	OMP0452	OMP0458	OMP0457	-	450/338	OMP0450	439.00	35 7/16	900	9.5	4.3
600	OMP0602	OMP0608	OMP0607	-	600/450	OMP0600	486.00	47 1/4	1200	12.2	5.5
750	OMP0752	OMP0758	OMP0757	OMP0756	750/563	OMP0750	534.00	59 1/16	1500	15.0	6.8
900	OMP0902	OMP0908	OMP0907	OMP0906	900/675	OMP0900	596.00	70 7/8	1800	17.8	8.1
1050	OMP1052	OMP1058	OMP1057	OMP1056	1050/788	OMP1050	633.00	82 11/16	2100	20.6	9.3
1200	OMP1202	OMP1208	OMP1207	OMP1206	1200/900	OMP1200	683.00	94 1/2	2400	23.4	10.6
1350	OMP1352	OMP1358	OMP1357	OMP1356	1350/1013	OMP1350	731.00	106 5/16	2700	26.2	11.9

Options

Product # Kit	Product # Factory installed*	Price	Description
-	BD	+10%	Clean back
KIT-OMP-CE	-	238.00	Outside corner, 4 in. (102 mm)
KIT-OMP-CI	-	238.00	Inside corner, 4 in. (102 mm)
KIT-OMP-JT	-	101.00	Splice plate, 2 in. (51 mm)
KIT-OMP-JT-PE	-	153.00	Contour splice plate for BD option and/or heater with pedestals, 2 in. (51 mm)
KIT-OMP-PE	-	201.00	Round pedestal kit (2), 3 in. (76 mm)
KIT-OMP-PEC	-	201.00	Square-shaped pedestal kit (2), 2 in. (51 mm)
KIT-OMP-R-347 <sup>1</sup>	R <sup>1</sup>	271.00	Single-pole relay, coil 24V, without transformer: 22A at 120V, 208V, 240V - 19A at 277V - 18A at 347V
KIT-OMP-R-600 <sup>1</sup>	R <sup>1</sup>	271.00	Single-pole relay, coil 24V, without transformer: 10A at 480V, 600V
OMP-SV-XX	-	Upon request	Empty cabinet with length of XX mm (minimum: 154 mm, maximum: 2632 mm)
KIT-OMP-TB6-AV <sup>2</sup>	TB6AV <sup>2</sup>	222.00	Single-pole bi-metal tamperproof thermostat: 25A at 120V, 208V, 240V, 277V - 10A at 347V, 480V, 600V
KIT-OMP-TB26-AV <sup>2,3</sup>	TB26AV <sup>2,3</sup>	229.00	Double-pole bi-metal tamperproof thermostat: 25A at 120V, 208V, 240V, 277V - 10A at 347V, 480V, 600V
KIT-OMP-TRIAC-347 <sup>1</sup>	TRIAC <sup>1</sup>	102.00	Single-pole electronic relay, coil 24V, without transformer: 9A at 347V max.
KIT-OMP-TRIAC-347T <sup>1</sup>	TRIACT <sup>1</sup>	146.00	Single-pole electronic relay, coil 24V, with transformer: 9A max. (208V, 240V, 347V)
KIT-OMP-TRIAC-600 <sup>1</sup>	TRIAC <sup>1</sup>	190.00	Single-pole electronic relay, coil 24V, without transformer: 6A at 600V max.

\* For factory installed options, add the option number to the product number. See the Product Code section inside the front cover.

<sup>1</sup> Options installed at right end only.

<sup>2</sup> Options installed at left end only.

<sup>3</sup> «Off» position.

Add «BL» for white, «AM» for almond. Upcharge applicable for optional colors shown in the color chart section. Other voltages available upon request.

