

OKB Infrared Radiant Heater



Features

Finish

- Anodized aluminum.

Voltage

- 120V, 208V, 240V, 480V, 600V, 1-phase.
- Other voltages available upon request.

Construction

- No visible light is emitted by the heater.
- Built-in adjustable directional system.
- 60° standard radiation angle (optional 45°).

Heating element

- Incoloy stainless steel tubular heating element with 60° standard radiation angle (optional 45°).
- Quartz element with 60° standard radiation angle.

Installation

- Vertical or horizontal mounting for stainless steel element models.
- Horizontal mounting for Quartz element models.
- Surface-mounted to connection box (on non-combustible surface) or suspended by chains and eyelets (chains not included).
- Must be connected only to a circuit protected by suitable ground fault protection.
- 90 °C (194 °F) wiring is sufficient.
- Recommended installation height: 8 to 10 ft. (2.4 to 3 m).

Warranty

- 1-year warranty against defects.

Application


- Factory, warehouse, workshop, church.

Models

Watts	Product #				Price	Over-All Length		Heating Section		Weight	
	120V	208V	240V	600V		in.	mm	in.	mm	lb	kg
Incoloy stainless steel tubular heating element with 60° standard radiation angle (optional 45°)¹											
950	OKB299C611	OKB299C621	OKB299C631	-	1323.00	31 1/2	800	20	508	5.1	2.3
1500	OKB411C611	OKB411C621	OKB411C631	-	1435.00	43 1/2	1105	32	813	6.8	3.1
1900	OKB471C611	OKB471C621	OKB471C631	-	1454.00	49 1/2	1257	38	965	8.0	3.6
2000	-	OKB412C621	OKB412C631	OKB412C681	1376.00	43 1/2	1105	32	813	7.2	3.3
2300	-	OKB472C621	OKB472C631	OKB472C681	1503.00	49 1/2	1257	38	965	8.1	3.7
3000	-	OKB593C621	OKB593C631	OKB593C681	1641.00	61 1/2	1562	50	1270	9.9	4.5
3800	-	OKB713C621	OKB713C631	OKB713C681	2012.00	73 1/2	1867	62	1575	11.7	5.3
Quartz element with 60° standard radiation angle											
800	OKB258T611	OKB258T621	OKB258T631	-	1861.00	27 1/2	800	16	406	4.9	2.2
1600	OKB411T611	OKB411T621	OKB411T631	-	2207.00	43 1/2	1105	32	813	7.1	3.2
2500	-	OKB592T621	OKB592T631	OKB592T681	2311.00	61 1/2	1562	50	1270	9.7	4.4
3100	-	OKB713T621	OKB713T631	OKB713T681	2330.00	72 1/2	1867	62	1575	11.3	5.1

Options

Product # Kit	Price	Description
WGA040	127.00	Wire guard for heated section of 16" (406 mm)
WGA050	159.00	Wire guard for heated section of 20" (508 mm)
WGA081	183.00	Wire guard for heated section of 32" (813 mm)
WGA096	217.00	Wire guard for heated section of 38" (965 mm)
WGA127	258.00	Wire guard for heated section of 50" (1270 mm)
WGA157	240.00	Wire guard for heated section of 62" (1575 mm)

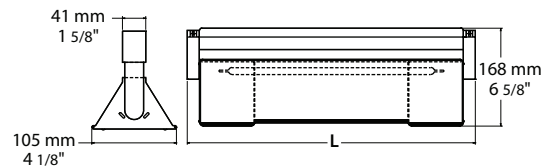

¹45° spread available upon request. Remember to change the 6 for 4 when ordering.

Example : OKB299C621 becomes OKB299C421.

Other voltages available upon request.