





TECHNICAL DETAILS

SA-LCD15

DIGITAL VENTILATOR WALL CONTROL

Decora-type wall control for residential air exchangers WITH RECIRCULATION MODE AND HUMIDITY MANAGEMENT.

GENERAL FEATURES


- 1. Fits standard 2 x 3" wall box.
- Included wall plate which can be user-substituted with any Decora style plate to suit any decor.

MODES OF OPERATION

- 1. ECONOMIC 20 min. Low speed/40 min. standby
- 2. Continue in High speed or Low speed
- 3. HUMIDITY switches to HIGH speed when ambient relative humidity exceeds user-adjustable setpoint
- 4. RECIRCULATION in High speed or Low speed
- OFF does not operate unless a timer request is received by a wall controller.

COMPATIBILITY

Compatible with ERVs and HRVs manufactured from November 2024.

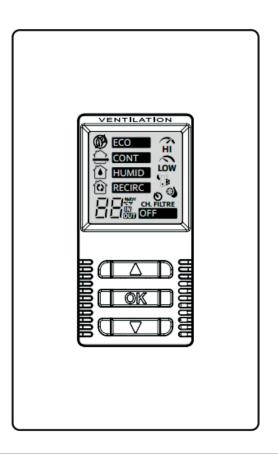

DIMENSIONS

