

# OCE European-Style Convector



## Features

### Color

- Standard: white, almond.
- Optional (upcharge applicable): metallic silver, bronze, metallic charcoal, aluminum, semi-gloss black, sand.
- Custom colors available upon request.

### Finish

- Standard: epoxy/polyester powder paint.
- Optional: stainless steel (grilles are painted in black).

### Voltage

- 240/208V, 50/60 Hz, 1-phase.

### Construction

- 20-gauge steel or 22-gauge stainless steel.
- Warm air outlet that directs the air to the centre of the room.
- Bar grilles prevent insertion of foreign objects; smooth-finish paint is washable and anti-yellowing.
- High-limit temperature control with automatic reset.

### Heating element

- Quiet aluminum monoblock element.

### Watt density

- OCEH: 850W/ft. (2800W/m).
- OCEM: 700W/ft. (2320W/m).
- OCEB: 500W/ft. (1700W/m).

### Control

- Built-in electronic thermostat (-TH models) or built-in 24V electronic relay (-TRIAC and -TRIACT models).
- Wall-mounted electronic thermostat (-OTH and -T600 models).

### Installation




- 2 in. (51 mm) minimum clearance to floor.
- The convector's wall mounting bracket is connected to the power supply.
- Simply place the convector on the bracket to make it operational.

### Warranty

- 5-year warranty against defects.
- (The warranty is valid only if the heater is controlled by a proportional pulsing electronic thermostat with a cycle of 15 seconds maximum and the junction box must be fixed to the wall with the supplied anchor.)*

### Application

- Kitchen, living room, family room, bedroom, bay window, basement.

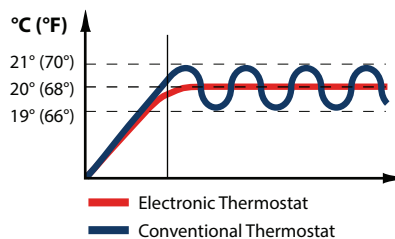

# OCE

## Models

Watts	Volts	Product #		Price		Product #		Price		Length		Weight	
		Non Programmable Built-In Thermostat <sup>1</sup>	Non Programmable Wall-Mounted Thermostat Included <sup>2</sup>	Standard Models	Stainless Steel	Programmable Wall-Mounted Thermostat Included <sup>2</sup>	Standard Models	Stainless Steel	in.	mm	lb	kg	
<b>OCEH Height: 27" (685 mm) 850W/ft. (2800W/m)</b>													
500/375	240/208	OCEH0500-TH	OCEH0500-OTH	538.00	659.00	OCEH0500-T600	565.00	686.00	10 5/8	270	14.0	6.4	
750/563	240/208	OCEH0750-TH	OCEH0750-OTH	566.00	694.00	OCEH0750-T600	593.00	721.00	13 1/2	344	17.0	7.7	
1000/750	240/208	OCEH1000-TH	OCEH1000-OTH	597.00	733.00	OCEH1000-T600	624.00	760.00	16 1/2	418	19.0	8.6	
1250/938	240/208	OCEH1250-TH	OCEH1250-OTH	631.00	775.00	OCEH1250-T600	658.00	802.00	19 7/16	492	21.0	9.5	
1500/1125	240/208	OCEH1500-TH	OCEH1500-OTH	653.00	803.00	OCEH1500-T600	680.00	830.00	23	584	25.0	11.4	
1750/1313	240/208	OCEH1750-TH	OCEH1750-OTH	687.00	845.00	OCEH1750-T600	714.00	872.00	26 1/2	674	27.0	12.3	
2000/1500	240/208	OCEH2000-TH	OCEH2000-OTH	725.00	893.00	OCEH2000-T600	752.00	920.00	28 1/8	714	28.0	12.7	
2500/1875	240/208	OCEH2500-TH	OCEH2500-OTH	786.00	969.00	OCEH2500-T600	813.00	996.00	34	862	33.0	15.0	
3000/2250	240/208	OCEH3000-TH	OCEH3000-OTH	845.00	1043.00	OCEH3000-T600	872.00	1070.00	41 1/8	1044	39.0	17.7	
<b>OCEM Height: 18 1/2" (470 mm) 700W/ft. (2320W/m)</b>													
500/375	240/208	OCEM0500-TH	OCEM0500-OTH	522.00	639.00	OCEM0500-T600	549.00	666.00	13 1/2	344	13.0	5.9	
750/563	240/208	OCEM0750-TH	OCEM0750-OTH	543.00	665.00	OCEM0750-T600	570.00	692.00	16 1/2	418	15.0	6.8	
1000/750	240/208	OCEM1000-TH	OCEM1000-OTH	574.00	704.00	OCEM1000-T600	601.00	731.00	19 7/16	492	16.0	7.3	
1250/938	240/208	OCEM1250-TH	OCEM1250-OTH	609.00	748.00	OCEM1250-T600	636.00	775.00	23	584	19.0	8.6	
1500/1125	240/208	OCEM1500-TH	OCEM1500-OTH	644.00	792.00	OCEM1500-T600	671.00	819.00	26 1/2	674	21.0	9.5	
1750/1313	240/208	OCEM1750-TH	OCEM1750-OTH	675.00	830.00	OCEM1750-T600	702.00	857.00	30 5/16	769	23.0	10.5	
2000/1500	240/208	OCEM2000-TH	OCEM2000-OTH	710.00	874.00	OCEM2000-T600	737.00	901.00	34	862	25.0	11.4	
2500/1875	240/208	OCEM2500-TH	OCEM2500-OTH	771.00	950.00	OCEM2500-T600	798.00	977.00	41 1/8	1044	29.0	13.2	
3000/2250	240/208	OCEM3000-TH	OCEM3000-OTH	832.00	1027.00	OCEM3000-T600	859.00	1054.00	48 3/8	1229	34.0	15.5	
<b>OCEB Height: 14" (356 mm) 500W/ft. (1700W/m)</b>													
500/375	240/208	OCEB0500-TH	OCEB0500-OTH	550.00	674.00	OCEB0500-T600	577.00	701.00	19 7/16	492	13.0	5.9	
750/563	240/208	OCEB0750-TH	OCEB0750-OTH	570.00	699.00	OCEB0750-T600	597.00	726.00	23	584	15.0	6.8	
1000/750	240/208	OCEB1000-TH	OCEB1000-OTH	608.00	747.00	OCEB1000-T600	635.00	774.00	26 1/2	674	16.0	7.3	
1250/938	240/208	OCEB1250-TH	OCEB1250-OTH	647.00	795.00	OCEB1250-T600	674.00	822.00	34	862	20.0	9.1	
1500/1125	240/208	OCEB1500-TH	OCEB1500-OTH	680.00	837.00	OCEB1500-T600	707.00	864.00	36 3/8	924	22.0	10.0	
1750/1313	240/208	OCEB1750-TH	OCEB1750-OTH	715.00	880.00	OCEB1750-T600	742.00	907.00	41 1/8	1044	24.0	10.9	
2000/1500	240/208	OCEB2000-TH	OCEB2000-OTH	741.00	913.00	OCEB2000-T600	768.00	940.00	46 7/16	1179	26.0	11.8	
2500/1875	240/208	OCEB2500-TH	OCEB2500-OTH	802.00	989.00	OCEB2500-T600	829.00	1016.00	62 3/16	1579	35.0	15.9	
3000/2250	240/208	OCEB3000-TH	OCEB3000-OTH	864.00	1067.00	OCEB3000-T600	891.00	1094.00	69 5/16	1760	38.0	17.3	

## Options

Product # Kit	Product # Factory installed*	Price	Description
KIT-OCE-AV	-	11.00	Tamperproof device
KIT-OCE-TRIAC-347 <sup>3</sup>	TRIAC <sup>3</sup>	65.00	Single-pole electronic relay, coil 24V, without transformer, 15A at 347V max.
KIT-OCE-TRIAC-347T <sup>3</sup>	TRIACT <sup>3</sup>	94.00	Single-pole electronic relay, coil 24V, with transformer, 15A at 208V, 240V, 347V

\* For factory installed options, add the option number to the product number. See the **Product Code** section inside the front cover.

<sup>1</sup> Almond product comes with almond built-in thermostat.

<sup>2</sup> Wall-mounted thermostat is white.

<sup>3</sup> Do not install a built-in thermostat with these options. Wall-mounted thermostat not included.

Add "BL" for white, "AM" for almond and "SS" for stainless steel. For stainless steel models, only the grille are black painted.

Upcharge available for optional colors shown in the color chart section.

The OCE warranty is valid only if the heater is controlled by a proportional electronic pulsing line thermostat with a cycle of 15 seconds maximum and the junction box must be fixed to the wall with the supplied anchor.

