OVE European-Style Bathroom Fan Heater





Features

Color

- Standard: white, almond.
- Optional (upcharge applicable): metallic silver, bronze, metallic charcoal, aluminum, semi-gloss black, sand.
- Custom color available upon request.

Finish

- Standard: epoxy/polyester powder paint.
- · Optional: stainless steel (grilles and back of the heater are painted black).

Voltage

• 120V, 240/208V, 1-phase.

Construction

- 20-gauge steel or 22-gauge stainless steel.
- Outlet-grille efficiently distributes warm air throughout the heated area.
- Bar grilles prevent insertion of foreign objects;
- smooth-finish paint is washable and anti-yellowing.
- High-limit temperature control with automatic reset.

Fan

- Whisper-quiet squirrel-cage fan.
- Factory-lubricated motor.

Models

			Price		Weight	
Watts	Volts	Product #	Standard Models	Stainless Steel	lb	kg
1500	120	OVE1502 ¹	446.00	572.00	14.0	6.4
1500	120	OVE1502-T	513.00	655.00	14.0	6.4
1500	120	OVE1502-TM	556.00	710.00	14.0	6.4
1500/1125	240/208	OVE1500 ¹	377.00	482.00	14.0	6.4
1500/1125	240/208	OVE1500-T	433.00	557.00	14.0	6.4
1500/1125	240/208	OVE1500-TM ²	471.00	602.00	14.0	6.4
1500/1125	240/208	OVE1500BL-TM ³	306.00	-	14.0	6.4

Requires non pulsing wall-mounted thermostat. Please refer to the Wall Thermostats Reference Chart at the end of the catalog.

² Price for standard "AM" almond color and base price for upcharge applicable on optional colors.

³ Price for standard "BL" white color. Add "BL" for white, "AM" for almond, "SS" for stainless steel. For almond models with -T or -TM the knobs are black

For stainless steel models the grilles and the back of the heater are painted black.

Upcharge available for optional colors shown in the color chart section.

Heating element

Ð

- Nickel-chromium alloy stitched wire protected by mica insulators.
- Heating element provides instant heat.

Control

- Bulb thermostat (-T and -TM models).
- Mechanical timer, 0-60 minutes (-TM model).

Note: If an electronic wall-mounted thermostat is used, it must be compatible with forced-air heaters.

Installation


- 12 in. (306 mm) minimum clearance to floor.
- May be recessed or surface-mounted without adaptor in 2 in. X 3 in. stud partitions.
- Holes for fastening and convenient knock-outs allow for easy installation and connection (mounting screws included).

Warranty

• 5-year warranty against defects.

Application

• Bathroom, kitchen, family room, entrance way.

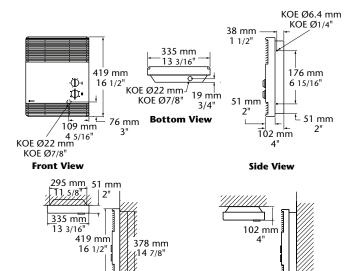

Wall-Mounted

Recessed